





the closest approach to the original sound.



### Where It All Started

It was way back in the mono days of 1949 that Quad launched its first loudspeaker, the Corner Ribbon. This was, indeed, a prestige product, but it offered something special, a particularly clear and detailed upper midrange to treble performance from a large and delicate ribbon driver.

Plaudits abounded from the press and everyone who heard the Corner Ribbon. The Gramophone observed :

...smoothness, naturalness, and fidelity of reporoduction has yet to be surpassed and, with very few exceptions, even approached.

**(** 

...And that was 1949. So, the question is, can Quad engineers replicate this performance today, or even surpass it? the answer, not surprisingly, is yes.

29

DECEMBER 1951

WIRELESS WORLD

#### **DEPTH** PERSPECTIVE . .

The ability of a reproducer in separating the instruments of an orchestra is dependant among other factors upon the area from which the sound appears to emanate. Many experimenters will have found that a larger area appears to improve orchestral analysis but that it detracts from the realism of solo instruments and the human voice. In the Corner Ribbon Loudspeaker, the sound source is small and forward, but it radiates a source is small and forward, but it radiates a proportion of sounds in nearly all directions, including upwards and to the rear. The sound pattern reproduced from solo instruments is very

similar to that obtained in nature and it is probably the only loudspeaker which can be used in direct comparison laboratory tests to give a complete illusion of most instruments to a critical audience

With an orchestra, the larger microphone distances influence the acoustics of the recording so that the apparent sound source in the loudspeaker Reflections from the back radiation add to the area of sound so that it now appears to emanate from an opening of eight to ten square

The above is just one of the reasons why the Corner Ribbon Loudspeaker



It is important to remember that a good loudspeaker will give you music, noise and distortion, all faithfully reproduced. The QUAD amplifier used with a good loudspeaker will give you the closest approach to the original sound.

THE Q.U.A.D. AMPLIFIER in two units as illustrated



THE CORNER RIBBON LOUDSPEAKER

£83





# Corner Ribbon Loudspeaker



Dimensions of the Corner Ribton loudspeaker are: height, 34in.; maximum radius, 24in. The high-frequency horn is segmented to give improved sound distribution.

THE development of this high-quality reproducer, which is made by the Acoustical Manufacturing Company, of Huntingdon, has been carried out against a background of measurement and subjective

against a background of measurement and subjective listening tests involving comparison between the original and the reproduced sound. In deciding on the final design, considerations of naturalness and "presence," for which methods of measurement have not yet been evolved, were given due weight.

Essentially, the unit comprises a twin cone diaphragm loudspeaker for low frequencies and a horn-loaded ribbon diaphragm for frequencies above 2,000c/s. The back radiation from the l.f. unit is modified by a two-stage acoustic filter and emanates from a vent at the bottom of the cabinet. Two stages are used to give a smooth downward extension of the low-frequency response without introducing the low-frequency response without introducing complications in the region of 150-200 c/s.

The 0.0002jin-thick aluminium ribbon diaphragm

the 0.00025in-theke auminium rioson diaparagin of the h.f. unit is loaded at the front by a multiple hom designed to give the optimum distribution both vertically and horizontally. The back radiation is directed towards the corner walls of the room and provides further extension of the sound source to enhance the realism of orchestra music On speech the residual directional properties of the main cone predominate and give the appropriate effect of a


predominate and give the appropriate effect of a point source.

We have had an opportunity of listening to this loudspeaker on a variety of programmes, and the loudspeaker on a variety of programmes, and the manner in which the apparent source adapts itself automatically to the frequency content of the original is strikingly effective. Another outstanding quality of the performance is the transient response. One does not need to wait for loud and dramatic passages in the music to demonstrate this. It is there all the time, in the bowing attack of strings in planissimo passages and in other subtle ways that will be appreciated by those that have ears to hear. For instance, the difference in quality between a


Realistic Sound Distribution

spherical and an elliptical reproducing point on high quality recordings is at once apparent.

The bass response is smooth, and judging from some organ recordings, effective down to frequencies of the order of 20 to 30 c/s. In the top register the character of surface noise is much less objectionable than usual, due no doubt to the effective damping of the ribbon and the absence of resonant coloration. The response has not been measured by the makers above 18 kc/s, but is believed to extend to 30 kc/s. A cross-over network is included and the input impedance is 15 ofms. It is important that sustained single-tone inputs to the h.f. unit should not exceed a power of 1.5 watts, but on speech and music the power input to the loudspeaker as a whole can be raised to 12 watts. Normally, the Corner Ribbon loudspeaker will be installed by the manufacturers, and the price is £83.



Section of bass acoustic filter, with equivalent circuit.  $R_1$  and  $R_2$  represent radiation resistance of the front of the cone and the cabinet vent.



WIRELESS WORLD, JANUARY, 1950







Quad S2 Speakers in Black Oak pictured with Quad Artera Play CD Player / DAC and Artera Stereo Power Amplifier



### Then And Now

The Quad corner ribbon was a speaker incomparable to competitors at it's time, all with thanks to the Quad ethos, which is still adhered to in all product development and to deliver; "The Closest Approach To The Original Sound".


Being our first ever commercially available loudspeaker, the Corner Ribbon was not completely perfect - it generated a relatively low power and the ribbon unit was very fragile. As we know founder Peter Walker moved on to develop the world's first full range, push-pull Electrostatic speaker, if not the most iconic loudspeaker of our time.

So, to make a ribbon unit that handled today's high power amplifiers and to do the original Corner Ribbon justice was no mean task. The S Series ribbon accomplishes this by utilising a composite ribbon sandwich substrate that is far more robust than earlier designs and immerses this ribbon in an exceptionally strong magnetic field to yield ultra-high sensitivity.








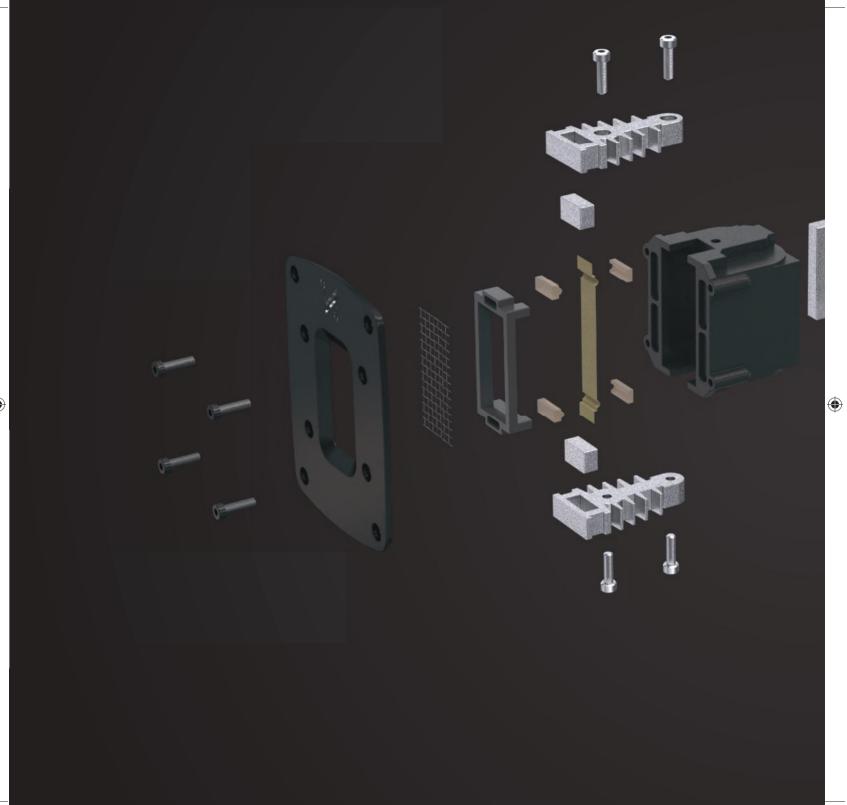



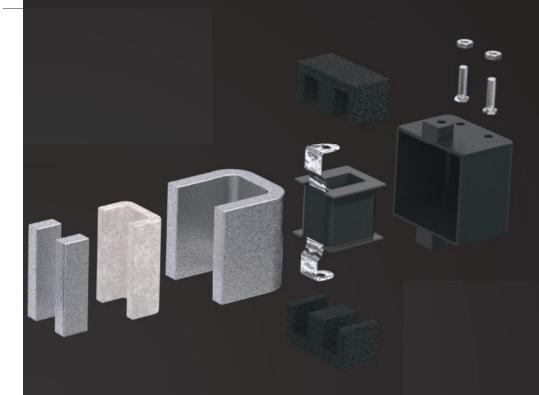

Unlike conventional dome treble units where the voice coil 'motor' is attached separately to the diaphragm, S Series ribbon is both the diaphragm and the motor system.

While taking influence from the unparalleled success of the ESL speaker, the ribbon itself is engineered to be extremely light and thin, which delivers the startling accuracy and wide coverage Quad is famous for.

The result is a unique combination of delicacy, smoothness and hear-through performance that helps make your music sing.









# Driver Technology

The ribbon tweeter is aligned with Quad's Kevlar-coned bass and midrange drivers through sophisticated crossover networks. Through our extensive and innovative approach to loudspeaker design on the floorstanders of S Series, ABRs or auxilliary bass radiators have been implemented, and offer many benefits when compared with conventional bass reflex ports.

In inferior loudspeakers, air rapidly moving in and out of bass ports can cause an unwanted "chuffing" sound. While ABRs replace the mass of the air in the port tube with an equivalent mass diaphragm, they significantly reduce distortion and give a more stable sound with lower bass extension.

The result of this is that the clarity of the bass frequencies are equally matched with the detail of the ribbon tweeter – these frequencies extend right down to reach the fundamentals of orchestral instruments, creating our signature, breathtaking sound we are known for and as found in the original ESLs.








# The Finishing Touch

Beautifully presented with rounded top edges at the front and rear, each speaker cabinet uses a sandwich construction of alternate layers of MDF and high-density particleboard to reduce panel resonance to below the level of audibility. Aesthetically, the look is classically Quad yet subtly updated, available in a choice of black or sapele mahogany wood veneers or a premium, hand-lacquered finish option, either in black or white.



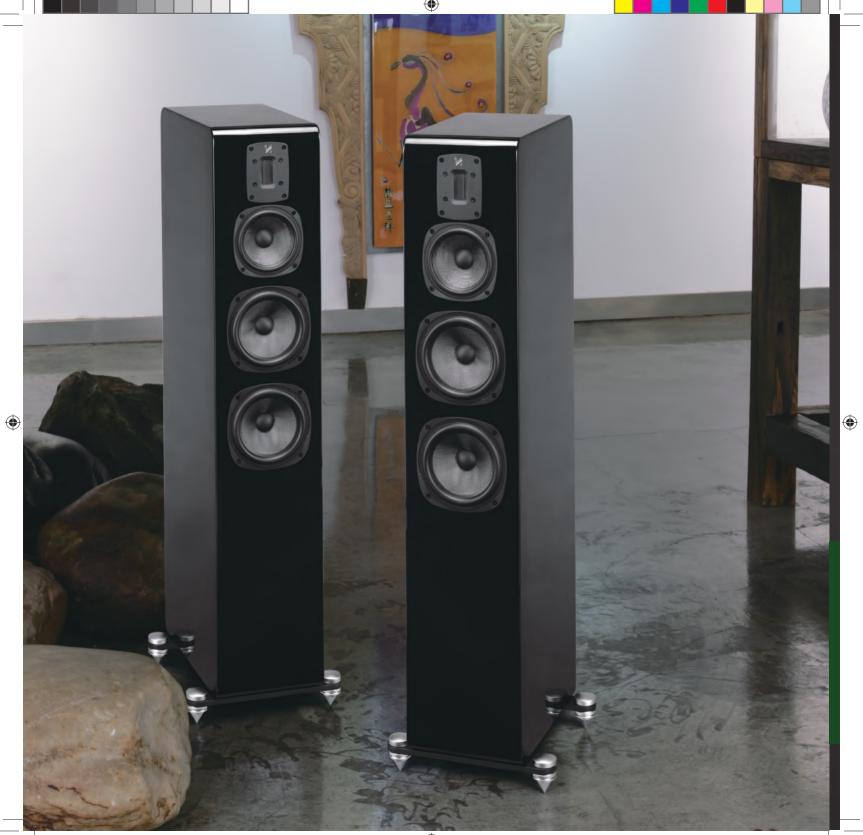





A very grown-up, transparent and sophisticated sound from a little speaker... A baby box touched by the magic of Quad's most expensive designs

Quad S1 - Hi-Fi Choice, December 2015



## Specifications





**(** 

Model S1 S2

General DescriptionbookshelfbookshelfEnclosure typevented boxvented boxTransducer complement2-way2-way

ABR

Bass driver

Midrange driver100mm Woven Kevlar125mm Woven KevlarTreble driver45 x 12mm true ribbon45 x 12mm true ribbon

Sensitivity (1W @ 1m)84dB87dBRecommended amplifier power25-150W25-150W

 $\begin{array}{lll} \mbox{Nominal impedance} & 8\Omega & 8\Omega \\ \mbox{Minimum impedance} & 4.2\Omega & 4.5\Omega \end{array}$ 

**Frequency response (+/-3dB)** 58Hz - 20kHz 48Hz - 22kHz

Bass Extension (-6dB)55Hz37HzCrossover frequency3.2kHz3kHzCabinet Volume (in litres)6.7L10.3L

**Dimensions**  $285 \times 156 \times (240 + 30) \text{mm}$   $330 \times 180 \times (260 + 30) \text{mm}$ 

Net weight 5.2kg each 6.1kg each









**(** 

**S**4

**S**5

SC

floor-standing	floor-standing	centre speaker
ABR	ABR	vented box
3-way	3-way	2-way
3 x 125mm	3 x 165mm	
2 x 125mm Woven Kevlar	2 x 165mm Woven Kevlar	
100mm Woven Kevlar	100mm Woven Kevlar	2 x 100mm Woven Kevlar
45 x 12mm true ribbon	45 x 12mm true ribbon	45 x 12mm true ribbon
88dB	90dB	86dB
40-200W	40-200W	25-150W
6Ω	$6\Omega$	$8\Omega$
$3.5\Omega$	3.2Ω	$4.4\Omega$
44Hz - 23kHz	42Hz - 23kHz	65Hz - 20kHz
37Hz	35Hz	60Hz
520Hz / 3.9kHz	570Hz / 3.2kHz	2.8kHz
47L	72.4L	12.8L
870 + (55 x 180) x (300 + 30)	(1070 + 55 ) x 205 x (330 + 30)mm	(160+5) x 400 x (200 + 30)mm
mm 20.5kg each	25.32kg each	6.3kg each





QUAD |

IAG House, 13/14 Glebe Road, Huntingdon, Cambridgeshire, PE29 7DL, UK Tel: +44(0)1480 452561 Web: www.quad-hifi.co.uk